

NOTE:

1. Material:

Housing: Thermoplastics,UL94V-0; (PBT,BLACK)
 CAP: Thermoplastics,UL94V-0;(LCP,BLACK)
 Contact: Copper Alloy
 Hook: Stainless Steel
 Shell: Stainless Steel

2. Finish:

Contact: Au 30u" Plated on Contact Area,
 80u" Min.Tin Plated on Solder Tails Area,
 50u" Min.Nickel Underplating Over All.
 Shell: 50u" Min.Nickel Underplating Over All.

3. Specification:







3.1: Electrical:

Insulation Resistance(EIA-364-21):
 100MΩ Min. at 500V/DC for 1Minute.
 Contact Resistance(EIA-364-06): 30 mΩ Max.
 Dielectric Withstanding Voltage(EIA-364-20):
 No discharge, flashover or breakdown at 100V/AC 1Minute

4. Ordering Information

MUB BM SD - 027
 MINI USB SERIES — FOLLOW NUMBER 001~100
 CONNECTOR TYPE B TYPE MALE —
 CONNECTOR STYLE SOLDER TYPE

CONTACT NUMBER	SIGNAL NAME
PIN 1	VBUS
PIN 2	D-
PIN 3	D+
PIN 4	
PIN 5	GND

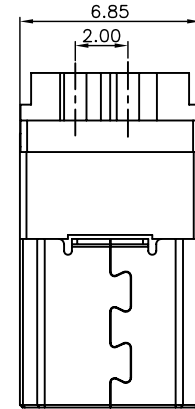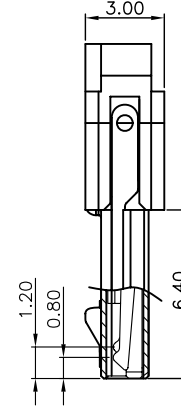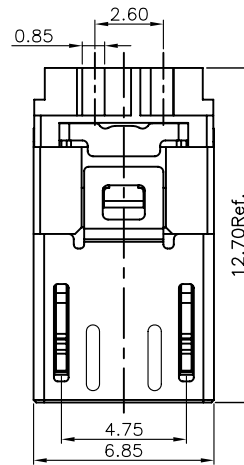

RoHS Compliant

單位 UNIT	MM	* Inspection Item		
比例 SCALE	1:1	Ⓢ Cp/Cpk and SPC Control Item		
張數 SHEET	1*1	TOLERANCE UNLESS OTHERWISE SPECIFIED		圖號 DWG NO.
製圖 DRAWN		.X±0.25	X'±3'	名稱 TITLE
版本 REV.	NEW	.XX±0.20	.X'±1'	Micro USB B Type Male(前五后四)
設變內容 MODIFICATION		.XXX±0.10	XX±	角法 PROJ.
日期 DATE	10.04.08	修改 DRAW	核准 APPROVE	審核 CHECKED
				客户图