RoHS Compliant

NOTE:

1. Material:
   Housing: Thermoplastics,UL94V-0(LCP,COLOR: BLACK).
   Contact: Copper Alloy (Brass).
   Shell: Stainless Steel.
2. FINISH:
   Contact: 3U" Gold Plated on Contact Area,
   Gold Flash Plated on Solder Area
   50u" Min.Nickel Underplating Over All.
   Shell: 50u" Min.Nickel Underplating Over All.
3. Specification:
   3.1: Electrical:
   Insulation Resistance(EIA-364-21):
   100MΩ Min. at 500V/DC for 1Minute.
   Contact Resistance(EIA-364-06): 50 mΩ Max.
   Dielectric Withstanding Voltage(EIA-364-20):
   No discharge, flashover or breakdown at 100V/AC 1Minute

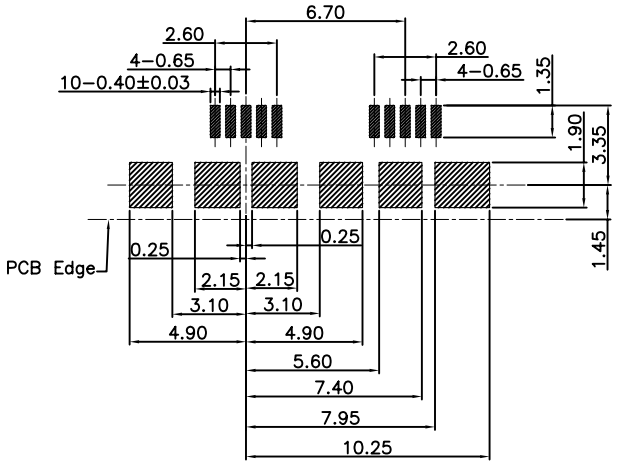

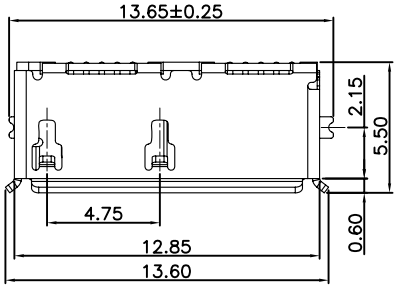

RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES:±0.05
FILLED AREA ARE PAD AREA



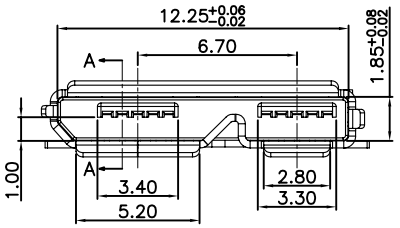



Section A-A



Ordering Information

MUB BF SMT -081

- MUB: Micro USB SERIES
- BF: CONNECTOR TYPE B TYPE FEMALE
- SMT: CONNECTOR STYLE SMT TYPE
- -081: FOLLOW NUMBER

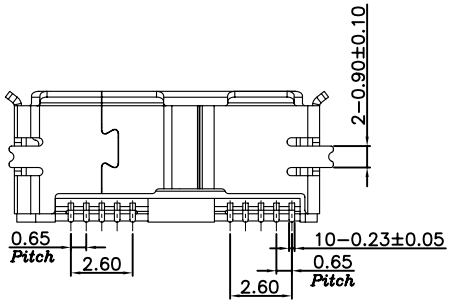



NO. 项次	NAME 品称	P/N 料号	PLATING 表面处理	MARK 备注
2	外壳	GMB30U-1A1-SN12	不锈钢壳镀可焊镍50u Min. 盐雾12Hours	1PCS
1	Molding 胶芯	HMB18L-1A1-BM00	LCP 黑色 端子全金，3u"	1PCS

REV. 版本	MODIFICATION 設變內容	DATE 日期	DRAW 修改	APPROVE 核准	CHECKED 審核
A0	NEW ISSUE	12.08.20	——	——	Lxb

UNIT 單位	MM	※:Inspection Item		
SCALE 比例	1:1	■:Cp/Cpk and SPC Control Item		
SHEET 張數	1*1	TOLERANCE UNLESS OTHERWISE SPECIFIED	DWG NO. 圖號	MUB BF SMT -081
DRAWIN 製圖	Lxb	.X±0.25 X'.± 3'	TITLE 名稱	Micro USB3.0 B FEMALE SMT TYPE
		.XX±0.20 .X'± 1'	PROJ. 角法	客户图
		.XXX±0.10 .XX'±		