

NOTE:

1. Material:

Housing: Thermoplastics,UL94V-0;(LCP,Black)
 Contact: Copper Alloy
 Shell: Stainless Steel

2. FINISH:

Contact: 30u" Gold Plated on Contact Area,
 Gold Flash Plated on Nickel Over All.
 50u" Min.Nickel Underplating Over All.
 Shell: 50u" Min.Nickel Underplating Over All.









3. Specification:

3.1: Electrical:

Insulation Resistance(EIA-364-21):
 100MΩ Min. at 500V/DC for 1Minute.
 Contact Resistance(EIA-364-06): 30 mΩ Max.
 Dielectric Withstanding Voltage(EIA-364-20):
 No discharge, flashover or breakdown at 100V/AC 1Minute

4. USB-IF TID Number: 60001810

5. Ordering Information

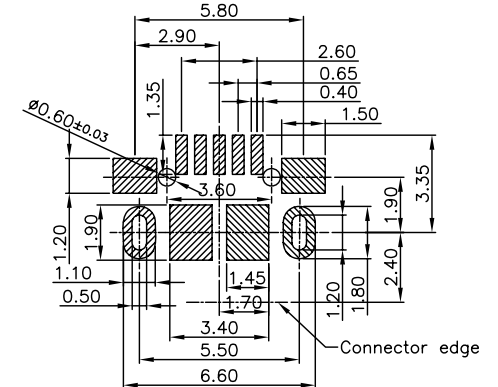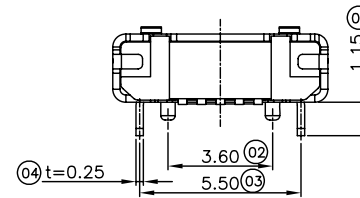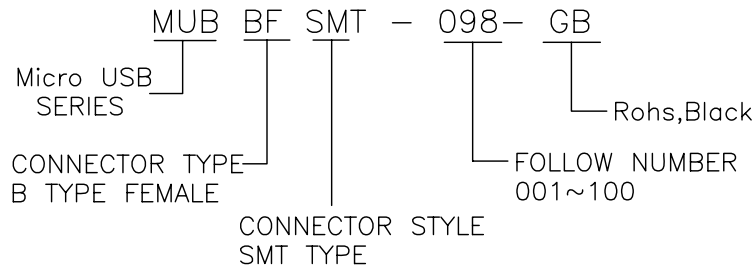

RECOMMENDED PCB LAYOUT(TOP VIEW)
 GENERAL TOLERANCES:±0.05

RoHS Compliant

單位 UNIT	MM	* Inspection Item	SHINE HEH 星赫科技有限公司 SHINE HEH TECHNOLOGY CO., LTD.	
比例 SCALE	1:1	◎ Cp/Cpk and SPC Control Item		
張數 SHEET	1*1	TOLERANCE UNLESS OTHERWISE SPECIFIED	圖號 DWG NO.	MUB BF SMT-098-GB
製圖 DRAWN	CLH	.X±0.25 .X'±3'	名稱	Micro USB BF 帶定位柱外壳无卷边
版本 REV.	NEW ISSUE	.XX±0.20 .X'±1'	角法	插脚中心距5.50
	設變內容 MODIFICATION	.XXX±0.10 .XX±	角法 PROJ.	客户图
	日期 DATE			
	修改 DRAW			
	核准 APPROVE			
	審核 CHECKED			